



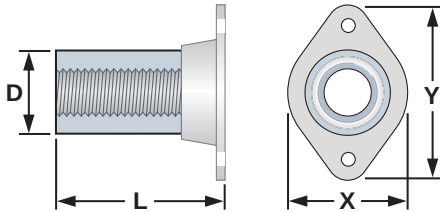
BPI® STAINLESS BARSPLICER SYSTEM

THREADED TYPE 303 STAINLESS STEEL COUPLER WITH OPTIONAL FLANGE

- **CORROSION-RESISTANT** – Austenitic stainless steel couplers and ASTM A955 stainless steel bars
- **INERT PLASTIC FLANGES AND PLUGS**
- **STANDARD NATIONAL COARSE THREADS**
- **DEVELOPED STRENGTH** – Has capacity to exceed:
 - 1.00 x f_u , GRADE 60 (Grade 420)
 - 1.25 x f_y , GRADE 60 (Grade 420)
 - 1.25 x f_y , GRADE 75 (Grade 520)
 - 1.25 x f_y , GRADE 80 (Grade 550)


f_u = specified tensile strength
 f_y = specified yield strength

STAINLESS BARSPLICER FLANGED COUPLER




REBAR SIZE mm (US) [CAN]	THREAD SIZE	PRODUCT CODE	WEIGHT (kg)	DIMENSIONS (mm)			
				LENGTH 'L'	DIAMETER 'D'	FLANGE 'X'	FLANGE 'Y'
13 (#4)	1/2 – 13 UNC	SS04FC	0.27	57	32	44	60
16 (#5) [15M]	5/8 – 11 UNC	SS05FC	0.28	64	32	44	60
19 (#6) [20M]	3/4 – 10 UNC	SS06FC	0.26	70	32	44	60
22 (#7)	7/8 – 9 UNC	SS07FC	0.44	76	38	51	70
25 (#8) [25M]	1 – 8 UNC	SS08FC	0.44	89	38	51	70
29 (#9) [30M]	1 1/8 – 7 UNC	SS09FC	1.13	102	51	67	95
32 (#10)	1 1/4 – 7 UNC	SS10FC	1.15	114	51	67	95
36 (#11) [35M]	1 3/8 – 6 UNC	SS11FC	1.13	127	51	67	95

STAINLESS BARSPLICER POSITION COUPLER



SIZE	THREAD	CODE	WEIGHT	'L'	'D'	FLANGE (NONE)
13 (#4)	1/2 – 13 UNC	SS04PC	0.31	57	32	-
16 (#5) [15M]	5/8 – 11 UNC	SS05PC	0.31	64	32	-
19 (#6) [20M]	3/4 – 10 UNC	SS06PC	0.30	70	32	-
22 (#7)	7/8 – 9 UNC	SS07PC	0.49	76	38	-
25 (#8) [25M]	1 – 8 UNC	SS08PC	0.49	89	38	-
29 (#9) [30M]	1 1/8 – 7 UNC	SS09PC	1.20	102	51	-
32 (#10)	1 1/4 – 7 UNC	SS10PC	1.21	114	51	-
36 (#11) [35M]	1 3/8 – 6 UNC	SS11PC	1.21	127	51	-

STAINLESS BARSPLICER DoughNUT™ (5 Ab, Meets ASTM A970 Class A & Class HA)




SIZE	THREAD	CODE	WEIGHT	'L'	'D'	FLANGE (NONE)
13 (#4)	1/2 – 13 UNC	SS04TERM	0.15	29	32	-
16 (#5) [15M]	5/8 – 11 UNC	SS05TERM	0.24	32	38	-
19 (#6) [20M]	3/4 – 10 UNC	SS06TERM	0.35	35	44	-
22 (#7)	7/8 – 9 UNC	SS07TERM	0.49	38	51	-
25 (#8) [25M]	1 – 8 UNC	SS08TERM	0.83	44	60	-
29 (#9) [30M]	1 1/8 – 7 UNC	SS09TERM	1.30	51	70	-
32 (#10)	1 1/4 – 7 UNC	SS10TERM	1.55	57	73	-
36 (#11) [35M]	1 3/8 – 6 UNC	SS11TERM	2.23	64	83	-

ALL DIMENSIONS ARE APPROXIMATE

HOW TO ORDER BPI® STAINLESS BARSPLICER SETTING AND SPLICE BARS

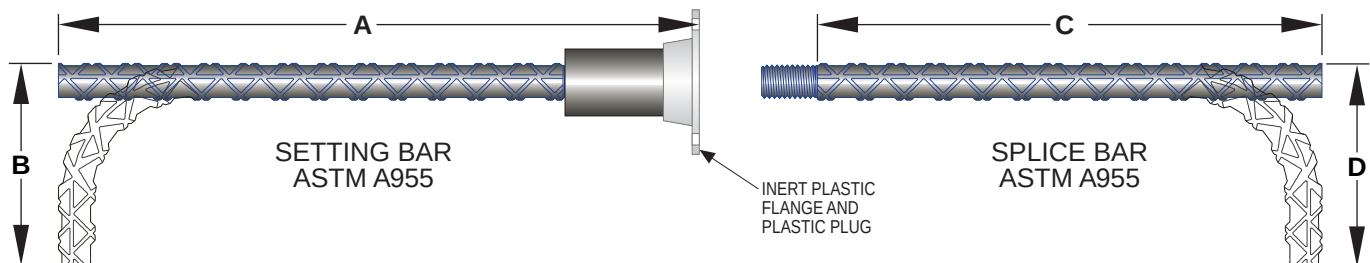The most commonly used SETTING and SPLICE bars are STRAIGHT or have a 90 DEGREE HOOK as follows...





















Using the following table is an easy way to organize your BPI® Stainless Barsplicer requirements. Many other configurations can be ordered as shown in the configuration chart on the back of this data sheet. Be sure to include the specific Setting and/or Splice bar OPTION PART NUMBER for easy

STAINLESS BARSPLICER		SETTING BAR(s)					SPLICE BAR(s)			
QUANTITY	BAR SIZE	PLASTIC FLANGE (CIRCLE)	BPI PART NUMBER (SEE CHART)	SPECIFY LENGTHS (METERS)			BPI PART NUMBER (SEE CHART)	SPECIFY LENGTHS (METERS)		
				'A'	'B'	OTHER		'C'	'D'	OTHER
		Y / N	BS-				BS-			
		Y / N	BS-				BS-			

Unless otherwise specified, bars shall be ASTM A955 / A955M; bend diameters and standard hook dimensions shall be per ACI Detailing Manual SP-66; length tolerances shall be per the CRSI Manual of Standard Practice. Customer is responsible for notifying BPI of any special space restrictions, tolerance, bar grade and/or strength requirements before placing order. All fabricated and/or in-process setting bars, splice bars and parts are non-cancellable and non-returnable.

BPI® STAINLESS BARSPLICER CONFIGURATION

The following chart shows the standard options and the dimensions to specify when ordering Barsplice setting and splice bars. Other configurations can be manufactured to order... just fax or e-mail a sketch to Barsplice Products, Inc. with your requirements.

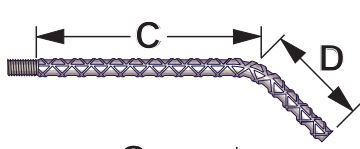STAINLESS SETTING BAR OPTIONS AND PART NUMBERS			STAINLESS SPLICE BAR OPTIONS AND PART NUMBERS		
BS-B	STRAIGHT SPECIFY 'A'		BS-H	STRAIGHT SPECIFY 'C'	
BS-F	90° BEND SPECIFY 'A' & 'B'		BS-G	90° BEND SPECIFY 'C' & 'D'	
BS-E	180° HOOK SPECIFY 'A'		BS-I	180° HOOK SPECIFY 'C'	
BS-C	45° BEND SPECIFY 'A' & 'B'		BS-P	45° BEND SPECIFY 'C' & 'D'	
BS-Q	135° BEND SPECIFY 'A' & 'B'		BS-R	135° BEND SPECIFY 'C' & 'D'	
BS-A	DOUBLE END SPECIFY 'A'		BS-O	DOUBLE END SPECIFY 'C' & 'Z'	
BS-D	U-SHAPE DOUBLE END SPECIFY 'A' & 'B'		BS-N	CONTINUITY DOUBLE END SPECIFY 'C'	
BS-J	POSITIONAL STRAIGHT SPECIFY 'A _p '		BS-L	POSITIONAL STRAIGHT SPECIFY 'C _p '	
BS-K	POSITIONAL 90° BEND SPECIFY 'A _p ' & 'B'		BS-M	POSITIONAL 90° BEND SPECIFY 'C _p ' & 'D'	
BS-S	HEADED STRAIGHT SPECIFY 'A'		BS-T	HEADED STRAIGHT SPECIFY 'C'	

Plastic Flanges are not structural in nature. Rebars may require supplemental support to maintain correct placement.

While the information contained in this document is believed to be accurate at the time of publication, BPI reserves the right to make changes, design modifications, corrections and other revisions as it sees fit, without notice. All products described herein are supplied in accordance with BPI's standard Terms and Conditions of Sale. This document is of a promotional nature only. Aspects of structural design, evaluation of product fitness for use, suitability or similar attributes are the responsibility of others.



**DOWNLOAD THE FREE BARSPlice APP
AND FOLLOW US ON SOCIAL MEDIA!**



Barsplice Products, Inc., 4900 Webster Street, Dayton OH 45414, USA
Tel: (937) 275-8700 • Fax: (937) 275-9566 • E-mail: bar@barsplice.com

Copyright © 2019, Barsplice Products, Inc., "BPI". All rights reserved. www.barsplice.com

